CLEAR-FLOW HOSE ASSEMBLY INSTRUCTIONS (PLASTIC ProPEX RING)

The World's Greatest No-Freeze, No-Sun-Heated Water Hose

TOOLS REQUIRED:


scissors, plumber's grease or oil, hot water (if necessary), pliers and hammer or PEX crimping tool


NOTE: If using hot water, allow 48 hours for hose to cure before using.


LIMITED WINTER USE


Hose is only freeze proof to -10°C/14°F without windchill. If desired for no-freeze winter use, **limit hose length to 150'**. For lengths 75' or longer, **do not use fitting on discharge end.**

	HOSE SIZES					
ASSEMBLE USING ▼	5/8″ HOSE	3/4" HOSE	3/4" LOW PRESSURE FILLER & SOAKER HOSES	1" HOSE	1.125" LOW PRESSURE HOSE	1.125" LOW PRESSURE FILLER & SOAKER HOSES
Male Nylon GH Fitting	D-3412	D-3458	no fitting — leave open	D-3434	D-3410 with female cheater	D-3434 with N 3400 cap
Female Nylon GH Fitting	B-3412-W	B-3458-W OR male adapter GLP-075-E*	B-3434-W OR male adapter GLP-075-E*	B-3434-W	no fitting — leave open	B-3434-W
ProPEX Rings	Two 1/2" rings	Two 5/8″ rings	One 5/8" ring	Two 3/4" rings	One 1" ring	Two 3/4" rings
* Provide with female coupler GLP-075-QD						










overlap fitting so that the tapered end of the fitting is visible beyond the ring.

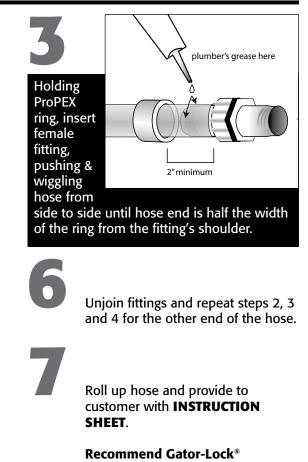

Quick-Connectors.